

21.5 inch Self-Ordering Kiosks

MANTO SERIES

Impressive Visual Experience & Multipurpose

21.5 inch FHD wide viewing angle display, MANTO Series adapts to changing business needs as well as consumers' demands. It serves as product display & advertising, ordering & payment, click & collect, ticketing & e-reservations and whatever business scenarios you wish.

Printer Adaptable

Comparing with traditional self-service kiosk, MANTO Series reduced constraints of printer. Any brands of printer that meet the requirements of dimension will do.

Modular Customizable

Equipped with a wide array of choices of peripherals including 2D scanner, camera and a bracket for EMV payment devices and offering two choices of counter-top or floor-standing. The MANTO Series is able to fulfill with all kinds of self-service tasks.



MANTO SERIES

The MANTO is the new all-in-one POS terminal. It packs innovativeness and functionality in compact design with stylish look, which is ideal for retail businesses where space is at premium.




MANTO SERIES

21.5 inch Self-Ordering Kiosks

SPECIFICATIONS

Model Number	MAN215W
SYSTEM	
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Celeron J4125 Quad-Core, Up to 2.70 GHz Intel Celeron J6412 Quad-Core, Up to 2.60 GHz Intel Core i3/i5 3rd, 4/5/6/7/8th High Performance CPU
Memory	2GB Standard, DDR3L or DDR4, up to 8GB/16GB/32GB
Storage	mSata or M.2 SSD, up to 512GB
OS	Windows 10, Windows 11, POSReady
DISPLAY	
Type	21.5 Inch TFT LED Backlight LCD
Resolution	1920*1080
Brightness	250cd/m2
Viewing Angle(CR≥10)	178 Degree(H) 178 Degree(V)
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4*USB
Serial	1*COM(RS232)
LAN	1*Gigabit Ethernet, RJ45
Power DC-IN	Input AC 100~240V/50~60hz, Output DC12V/7.5A
SCANNER	
Interface	USB, RS-232 Option
Image Sensor	1280*800 CMOS
Illumination	3000K White LED
Data Capture	1D: Code 11, Code 128, Code 39, GS1-128,(UCC/EAN-128), AIM 128, ISBT 128, Codabar, Code 93, UPC-A/UPC-E, Coupon, EAN-13, EAN-8, ISSN, ISBN, Interleaved 2/5, Industrial 2/5, ITF-14, ITF-6, Standard 2/5, China Post 25, MSI-Plessey, Plessey, GS1 Databar, GS1 Composite, Databar(RSS) 2D: PDF417, QR Code, Data Matrix, Aztec
Resolution	≥4mil(1D)
Typical Depth of Field	EAN-13 0mm-150mm (13mil) QR Code 30mm-100mm (15mil)
Scan Angle	Roll: 360°, Pitch: ±55°, Skew: ±50°
Min.Symbol Contrast	25%(Code 128 10mil)
Field of View	Horizontal 65.6°, Vertical 44.6°
PHYSICAL & ENVIRONMENTAL	
Printer Space	L160 x W130 x H200mm (Printer is not provided)
Operating Temperature	Operating 0~60°
Storage Temperature	Storage -35°~75°
Cooling	Fanless or with CPU Fan
Net Weight	Countertop Stand: 21.20KG Floor-standing: 23.00KG
Dimensions(W×H×D)	Countertop Stand: 310x832x310mm Floor-standing: 500x1596x360mm
Color	Black
OPTIONS & PERIPHERALS	
WIFI	Mini PCIe for Wireless LAN(Optional)
Bluetooth	Bluetooth 4.0(Optional)
Speaker	1*3W
Payment Terminal Bracket	Adjustable Bracket Optional

DIMENSION

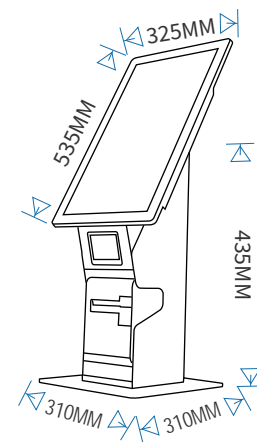

FEATURES



21.5 inch Anti-interference touch screen with FHD display



Printer adaptable and convenient installation



Internal IO ports and hidden cabling management



Modular bracket for EMV payment devices



Choices of counter-top or floor-standing style



High speed 2D scanner ensure smooth operation experience