

JAW-BS6208

2D Barcode Scanner With Stand


- ▶ Plug and play for quick and hassle-free set up.
- ▶ Reads 1D, 2D barcodes, QR codes on mobile phone screens.
- ▶ Auto sensing mode supports hands-free operations for greater convenience.
- ▶ Adjustable stand ensures greater ease of use
- ▶ Fast response time for operational efficiency.



JAW-BS6208 INDUSTRIAL 2D BARCODE SCANNER WITH STAND



DIMENSION

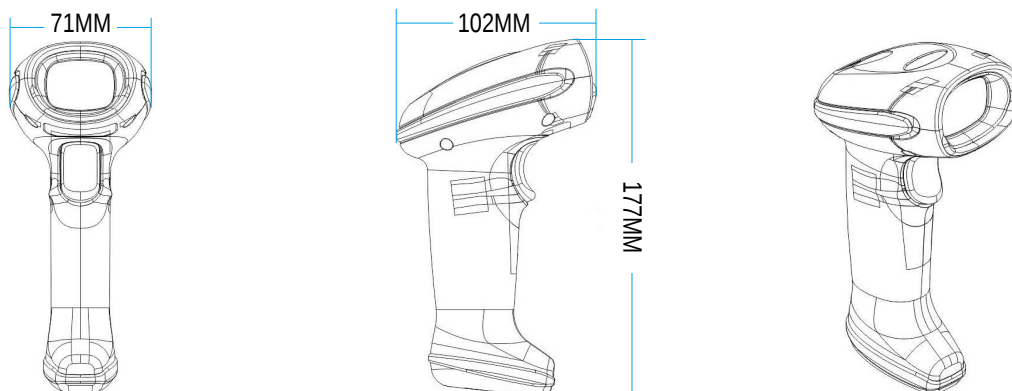

SPECIFICATIONS

Model Number	JAW-BS6208
Performance Parameters	
Light Sources	617nm LED Aimer, White LED
Supported Symbolologies	1D: EAN, UPC, Code 39, Code 93, Code 128, UCC/EAN 128, Codabar, Interleaved 2 of 5, ITF-6, ITF-14, ISBN, ISSN, MSI-Plessey, GS1 Databar, GS1 Composite Code, Code 11, Industrial 25, Standard 25, Plessey, Matrix 2 of 5. 2D: QR Code, Data Matrix, PDF417, Aztec, Maxicode, HanXin Code.
Resolution	640*480
Scan Method	Manual/ Continuous/ Automatic
Scan Angle	Yaw $\pm 60^\circ$, Rotation 360° , Pitch $\pm 60^\circ$
Precision	$\geq 5\text{mil}$
Depth of Scan Field	EAN13 50-200mm (13mil); QR 25-240mm(20mil); PDF147 30-130mm(6.67mil)
Error Rate	1/5 million
Interface	USB-HID
Physical Parameters	
Dimensions	102mm*71mm*177mm
Weight	162.3g
Material	ABS+PC
Cable Length	2m
Shock Resistance	3m drop to concrete
Environmental Parameters	
Operating Temperature	-20°C~50°C
Storage Temperature	-40°C~70°C
Ambient Lighting	0~100000LUX
Relative Humidity	5%~95% (Non-condensing)
Electrical Parameters	
Voltage	DC5V $\pm 5\%$